

PK pumps with peripheral impeller



RANGE OF PERFORMANCE

Flow rate up to 24 gpm
Head up to 328 ft

LIMITS OF USE

Manometric suction lift up to 26 ft
Liquid temperature up to + 140°F
Environment temperature up to + 104°F

CONSTRUCTION AND SAFETY STANDARDS

EN 60 335-1	EN 60034-1
IEC 335-1	IEC 34-1
CEI 61-150	CEI 2-3



INSTALLATION AND USE

They are recommended for pumping clean water without abrasive particles and liquids that are chemically non aggressive to the materials from which the pump is made.

FOR THEIR RELIABILITY, SIMPLICITY OF USE AND ECONOMY THEY ARE SUITABLE FOR RESIDENTIAL USE AND IN PARTICULAR FOR DISTRIBUTING WATER IN COMBINATION WITH SMALL PRESSURE SETS, FOR IRRIGATING GARDENS.

The pumps must be installed in enclosed places, or at least protected against inclement weather.

GUARANTEE 2 YEARS subject to our general terms of sale.


CONSTRUCTION CHARACTERISTICS

- **PUMP BODY:** cast iron, with threaded ports.
- **MOTOR BRACKET (patent n° 1289150):** aluminium with brass insert; reduces starting difficulties due to seizure of the impeller after long periods of inactivity.
- **IMPELLER:** brass, of the type with radial peripheral vanes.
- **MOTOR SHAFT:** stainless steel EN 10088-3 - 1.4104.
- **MECHANICAL SEAL:** ceramic - graphite - NBR.
- **ELECTRIC MOTOR:** the pumps are close-coupled to a carefully matched PEDROLLO electric motor, quiet running, totally enclosed fan cooled (TEFC), suitable for continuous duty.
 - PK: single-phase 115 V or 230 V - 60Hz with capacitor and thermal overload protector.
 - PK: three-phase 230/460 V - 60 Hz.
- **INSULATION:** class F. ● **PROTECTION:** IP 44.
- **REGISTERED MODEL n° 72753.**

OPTIONS ON REQUEST


- ⇒ special mechanical seal
- ⇒ other voltages or frequency 50 Hz

CURVES AND PERFORMANCE DATA

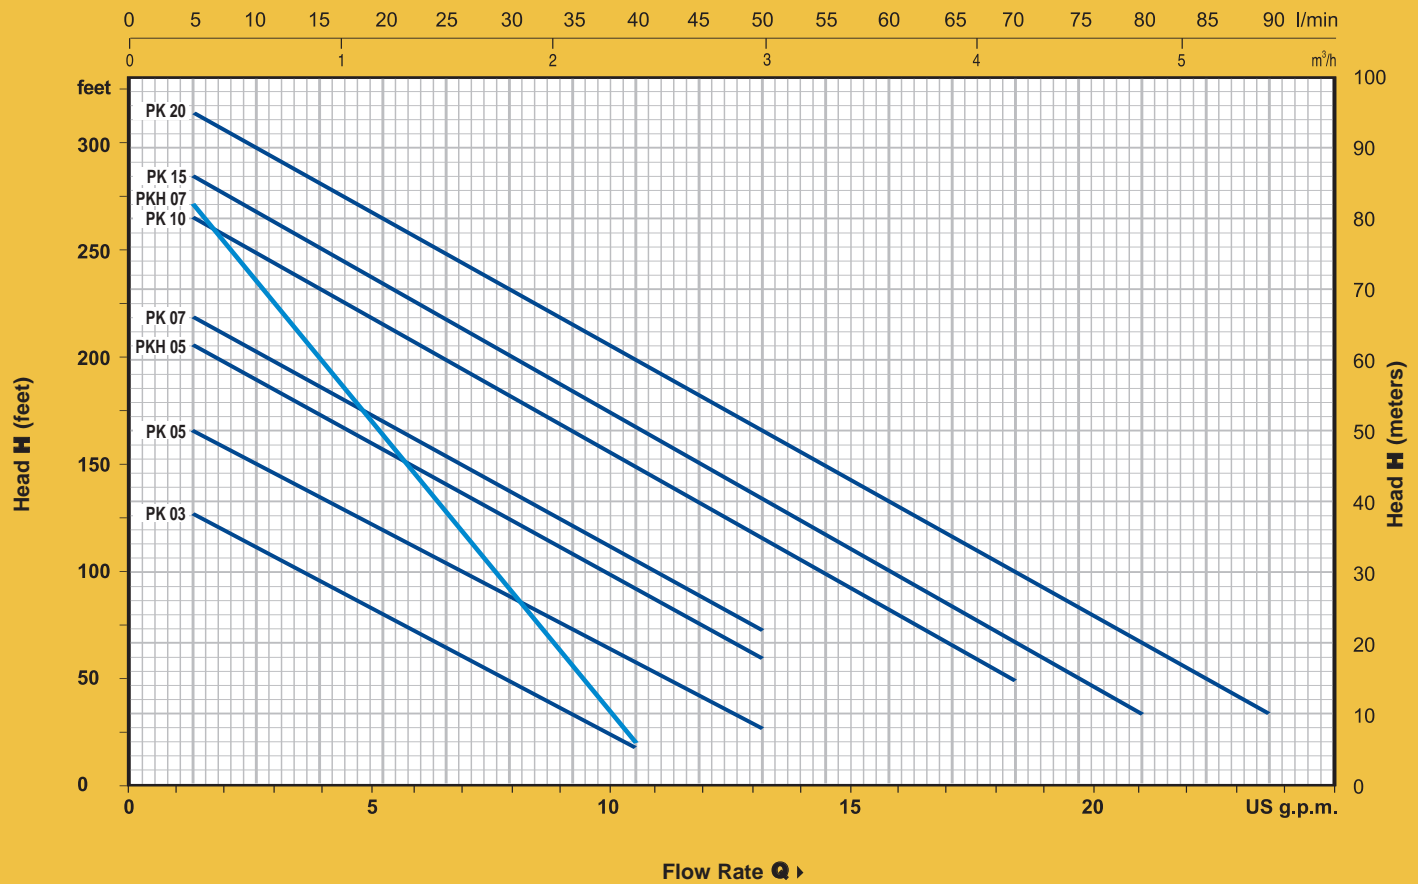

MODEL		HP	FLOW RATE GPM																													
1 PH	3 PH		FLOW RATE l/min																													
PK 03	PK 03	0.33	0	1.2	2.7	4	5.5	6.6	8	9.3	10.2	13.2	15	18	21	23	H Feet	0	5	10	15	20	25	30	35	40	50	60	70	80	90	
PK 05	PK 05	0.5	131	124	110	95	78	64	49	32	16							181	164	149	133	118	101	88	72	55	26					
PKH 05	PKH 05	0.5	214	203	187	170	154	137	121	105	88	59						230	216	200	183	167	151	134	119	101	72					
PK 07	PK 07	0.7	296	269	233	197	160	124	88	55	16							279	262	246	229	213	197	180	164	147	114	82	49			
PKH 07	PKH 07	0.7	296	269	233	197	160	124	88	55	16							296	282	266	249	233	215	197	180	164	131	98	65	32		
PK 10	PK 10	1	329	312	295	279	262	246	229	213	197	164	131	98	65	32																
PK 15	PK 15	1.5																														
	PK 20	2																														

DIMENSIONS AND WEIGHT

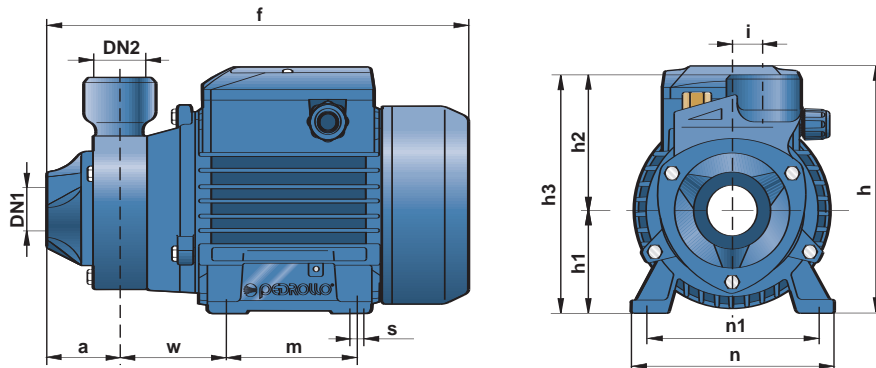

MODEL		SUCTION /DISCH		DIMENSIONS INCHES												LBS	
1 PH	3 PH	DN1	DN2	a	f	h	h1	h2	h3	i	m	n	n1	w	s	1~	3~
PK 03	PK 03	1"	1"	1.7	9.5	5.9	2.4	2.9	5.4	0.7	3.1	4.7	3.9	2.1	0.2	11.7	11.7
PK 05	PK 05	1"	1"	1.9	10,15/9,84	5.9	2.4	3.1	5.6	0.7	3.1	4.7	3.9	2.1	0.2	17.0	14.1
PKH 05	PKH 05	1"	1"	2.2	11.2	7.0	2.8	3.3	6.1	0.7	3.5	5.4	4.4	2.4	0.2	22.3	20.3
PK 07	PK 07	1"	1"	2.2	11.2	7.0	2.8	3.3	6.1	0.7	3.5	5.4	4.4	2.4	0.2	22.7	21.8
PKH 07	PKH 07	3/4"	3/4"	2.3	11.3	7.0	2.8	3.7	6.5	0.7	3.5	5.4	4.4	2.4	0.2	22.7	20.5
PK 10	PK 10	1"	1"	2.2	13.7	8.3	3.1	3.7	6.8	0.7	3.9	6.2	4.9	3.3	0.3	33.1	28.9
PK 15	PK 15	1"	1"	2.2	13.7	8.3	3.1	3.7	6.8	0.7	3.9	6.2	4.9	3.3	0.3	35.3	33.5
	PK 20	1"	1"	2.2	13.7	8.3	3.1	3.7	6.8	0.7	3.9	6.2	4.9	3.3	0.3		39.7