

DG PED EVO

Automatic pressurization system with inverter

 Clean water

 Domestic use

 Civil use



PRODUCT DESCRIPTION

DG PED EVO is a cutting-edge, automatic pressurization system featuring a high-efficiency, self-priming pump with multiple impellers. It comes complete with a storage tank, pressure and flow sensors, and a check valve, all designed to work quietly and efficiently.

This compact powerhouse stands out for its advanced electronic inverter control, which intelligently manages the system performance by:

- keeping the pressure constant according to water usage;
- monitoring hydraulic and electrical conditions to safeguard against malfunctions;
- allowing for integration with another DG PED EVO unit through an optional expansion card;
- adapting seamlessly to any type of pressurization system, even existing ones;
- reducing electrical consumption with lower startup and running currents, achieving greater energy efficiency.

INSTALLATION AND USE

- ※ **DG PED EVO** is designed to cater to the needs of single and two-family homes.
- ※ **DUAL-DG PED EVO** units are pre-assembled pump systems, perfectly suited for multi-unit residences.

TECHNICAL DATA

- ※ Power supply:
 - **1~ 230 V** $\pm 10\%$ DG PED 3 EVO, DG PED 5 EVO
 - **1~ 115 V** $\pm 10\%$ DG PED 3 EVO 115 V
- ※ Frequency: **50/60 Hz**
- ※ Insulation: **class F**
- ※ Maximum current absorbed:
 - **7.5 A** DG PED 3 EVO
 - **10 A** DG PED 5 EVO
 - **10 A** DG PED 3 EVO (115 V)
- ※ Maximum power input P1:
 - **1 HP** DG PED 3 EVO
 - **1-1/2 HP** DG PED 5 EVO
 - **3/4 HP** DG PED 3 EVO 115 V
- ※ Protection rating: **IP X4**
- ※ Set point from the factory: **45 psi**

APPLICATION LIMITS

- Manometric suction head up to **11 psi**
- Liquid temperature between: **32 °F** and **104 °F**
- Ambient temperature between: **32 °F** and **104 °F**
- Max. port pressure **58 psi**
- Max pressure **145 psi**
- Continuous running duty **S1**

PATENTS - TRADE MARKS - MODELS

- Registered community model No. 015048622-0001




CERTIFICATIONS IN PROGRESS



DG PED EVO

PERFORMANCE CURVES

Q (US gal/min) H (psi)

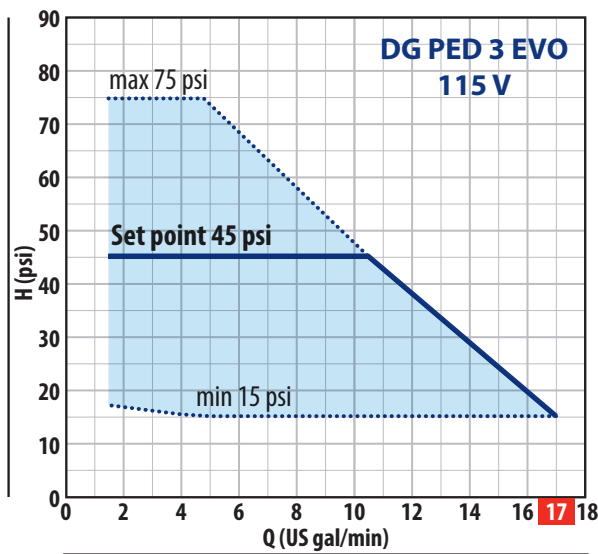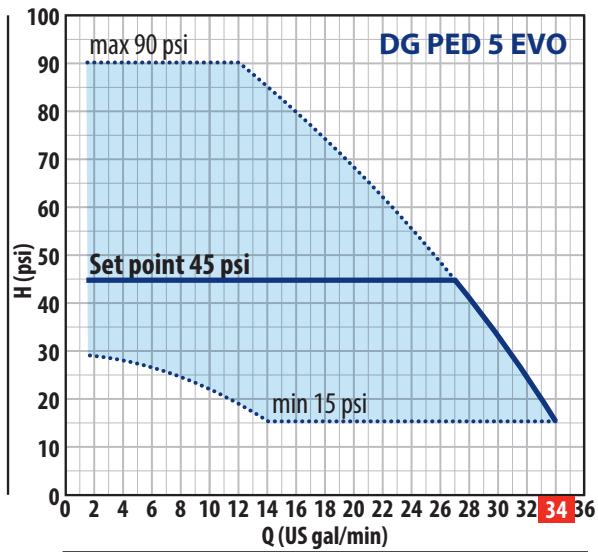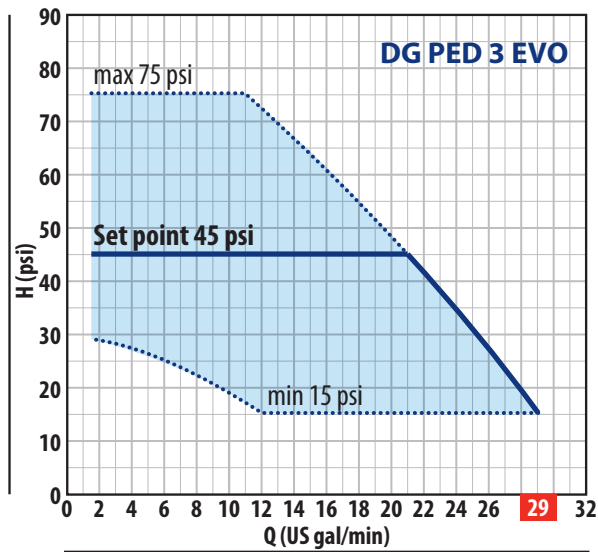


TYPE	POWER		PERFORMANCE		PERFORMANCE (ADJUSTABLE SET POINT)					
					Set Point Min		Set Point Calibration Std	Set Point Max		
Single-phase	HP	▲	Q US gal/min	H psi	psi	US gal/min	psi	US gal/min	psi	US gal/min
DG PED 3 EVO 230 V	1	IE3	1.5 – 29	75 – 15	15	12 – 29	45	1.5 – 21	75	1.5 – 11
DG PED 5 EVO 230 V	1-1/2		1.5 – 34	90 – 15	15	14 – 34	45	1.5 – 27	90	1.5 – 12
DG PED 3 EVO 115 V	3/4		1.5 – 17	75 – 15	15	5 – 17	45	1.5 – 10.5	75	1.5 – 4.8

Q = Flow rate H = Total manometric head ▲ Efficiency three-phase motor (IEC 60034-30-1)

PERFORMANCE CURVES FOR A GROUP OF TWO DG PED EVO UNITS

Q (US gal/min) H (psi)

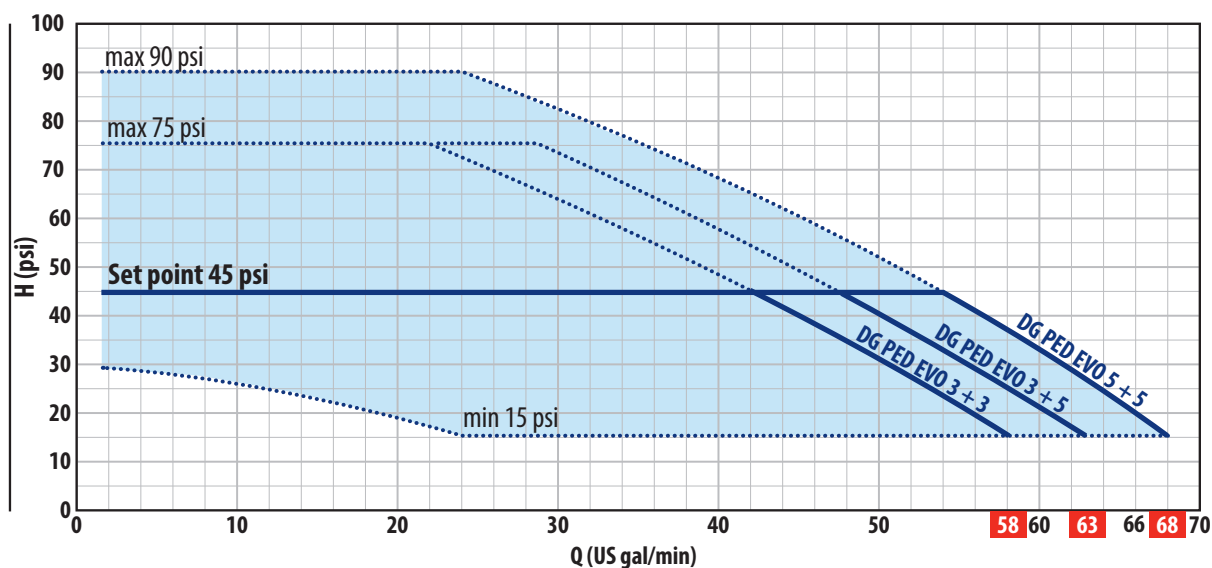

TYPE	POWER		PERFORMANCE		PERFORMANCE (ADJUSTABLE SET POINT)					
	HP	▲	Q US gal/min	H psi	Set Point Min		Set Point Calibration Std		Set Point Max	
Single-phase					psi	US gal/min	psi	US gal/min	psi	US gal/min
DUAL DG PED EVO 3+3	1+1	IE3	1.5 – 58	75 – 15	15	24 – 58	45	1.5 – 42	75	1.5 – 22
DUAL DG PED EVO 3+5	1+1-1/2		1.5 – 63	75 – 15	15	24 – 63	45	1.5 – 48	75	1.5 – 29
DUAL DG PED EVO 5+5	1-1/2+1-1/2		1.5 – 68	90 – 15	15	28 – 68	45	1.5 – 54	90	1.5 – 24

Q = Flow rate H = Total manometric head

▲ Three-phase motor efficiency (IEC 60034-30-1)

Performance curves comply with EN ISO 9906 Grade 3B tolerance limits.

DG PED EVO

KEY FEATURES



ALL IN ONE

- Self-priming multistage pump
- Frequency inverter
- Expansion tank
- Check valve
- Pressure and flow sensor



QUIET



COMPACT



CONSTANT PRESSURE



EASY TO USE




INSTALLABLE ANYWHERE

Thanks to its compactness, quiet operation, and 360° adjustable connections, DG PED EVO can be installed anywhere

TYPICAL INSTALLATION


ABOVE GROUND

(drawing from a shallow tank or well)

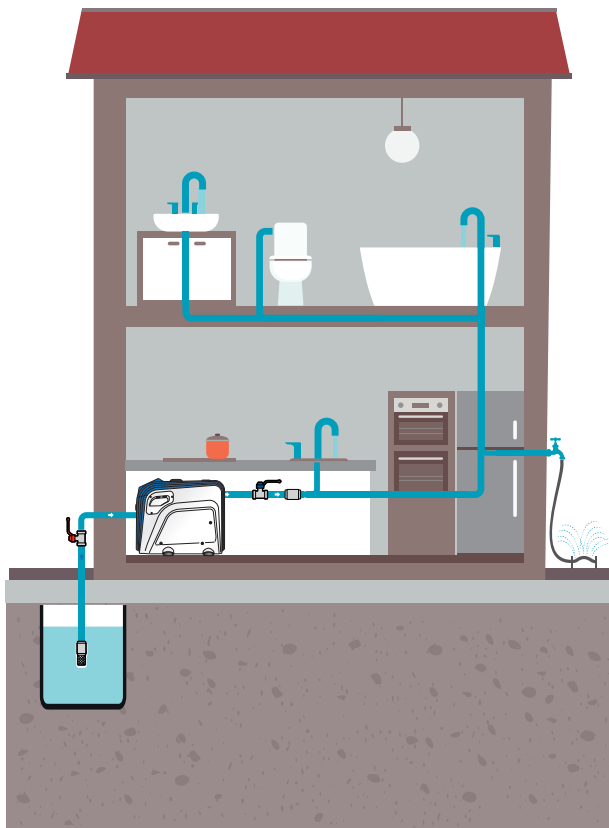


BELOW GROUND

(tank or aqueduct)

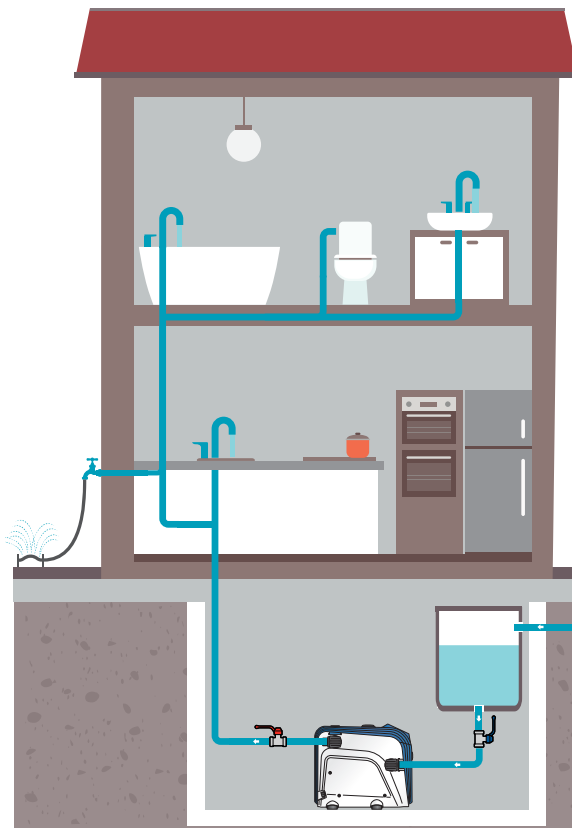


DIMENSIONS AND WEIGHTS (in.)

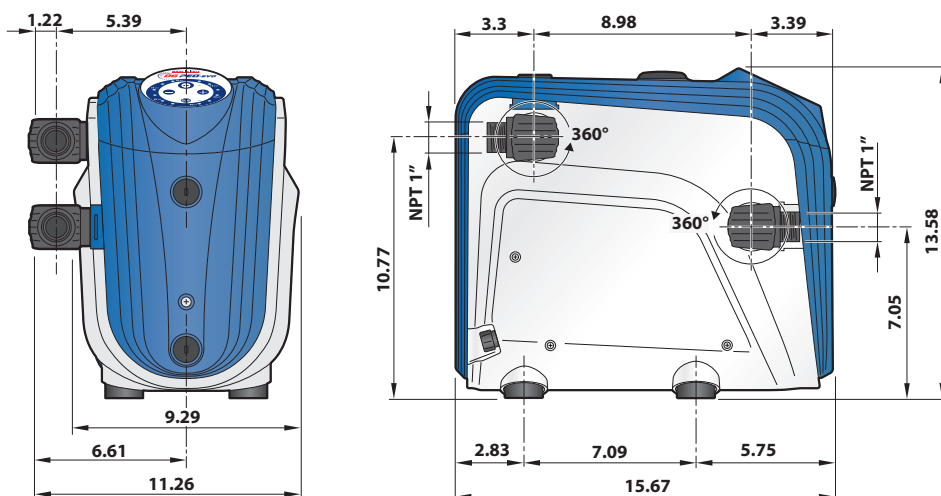

DG PED 3 EVO: **33 lbs.**
DG PED 5 EVO: **35 lbs.**

DUAL DG PED EVO DIMENSIONS AND WEIGHTS (in.)

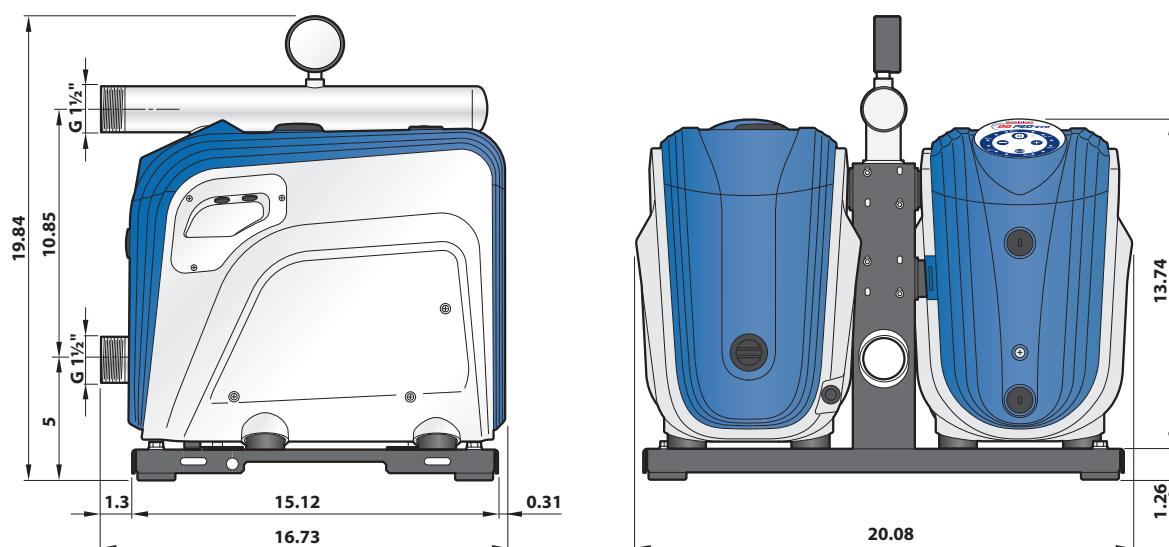

DUAL DG PED EVO 3+3: **94.8 lbs.**
DUAL DG PED EVO 3+5: **97 lbs**
DUAL DG PED EVO 5+5: **99.2 lbs.**

OPTIONAL ACCESSORIES



Connection kit for two
DG PED EVO units



Electronic
expansion board



Kit for wall installation of a
single DG PED EVO



Wall installation kit
of a two-unit group